CSAGN: Conversational Structure Aware Graph Network for Conversational Semantic Role Labeling

Han Wu^{1,2}, Kun Xu³, Linqi Song^{1,2*}

¹City University of Hong Kong Shenzhen Research Institute ²Department of Computer Science, City University of Hong Kong ³Tencent AI Lab

> hanwu32-c@my.cityu.edu.hk kxkunxu@tencent.com linqi.song@cityu.edu.hk

Abstract

Conversational semantic role labeling (CSRL) is believed to be a crucial step towards dialogue understanding. However, it remains a major challenge for existing CSRL parser to handle conversational structural information. In this paper, we present a simple and effective architecture for CSRL which aims to address this problem. Our model is based on a conversational structure-aware graph network which explicitly encodes the speaker dependent information. We also propose a multi-task learning method to further improve the model. Experimental results on benchmark datasets show that our model with our proposed training objectives significantly outperforms previous baselines.

1 Introduction

Recent research has achieved impressive improvements on conversation-based tasks, such as dialogue response generation (Li et al., 2017; Dinan et al., 2019; Wu et al., 2019), task-oriented dialogue modeling (Mrkšić et al., 2017; Budzianowski et al., 2018) and conversational question answering (Choi et al., 2018; Reddy et al., 2019). However, the frequent occurrences of ellipsis and anaphora in human conversations still create huge challenges for dialogue understanding. To address this, Xu et al. (2021) proposed the Conversational Semantic Role Labeling (CSRL) task whose goal is to extract predicate-argument structures across the entire conversation. Figure 1 illustrates an example, where a CSRL parser needs to identify "《泰坦尼克 号》(Titanic)" as the ARG1 argument of the predicate "看过 (watched)" and the ARGO argument of the predicate "是 (is)". One can see that in the original conversation, "《泰坦尼克号》(Titanic)" is omitted in the second turn and referred as "这 (this)" in the last turn. Xu et al. (2021) has demonstrated

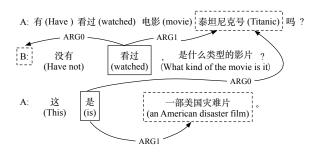


Figure 1: A conversational SRL example.

the usefulness of CSRL on many downstream tasks such as dialogue generation and dialogue rewriting.

Despite the successes that CSRL has achieved, existing CSRL model (Xu et al., 2021) is a simple extension of BERT. Specifically, they first encode each utterance into local contextual representations with pre-trained language models, and then utilize a stack of self-attention layers to obtain global contextual representations. We argue that their model may suffer two main problems. First, in the local feature extraction phase, they ignore the fact that jointly considering the predicate and context utterances could help the model better identify some relevant ommited arguments. Second, in the global feature extraction phase, some vital conversational structural information, such as the speaker information, is not properly encoded in their model. Indeed, speaker-dependent information is necessary for modelling inter-speaker and intra-speaker dependency, both of which could help the model to better handle coreference resolution and zero pronoun resolution.

Motivated by the above observations, we propose a new CSRL model, which consists of three main components. First, we use a pre-trained language model to generate local contextual representations for tokens (Sec. 2.1), which is similar to Xu et al. (2021). Then, we propose a new attention strategy to learn predicate-aware contextual representations for tokens (Sec. 2.2). Finally, we propose a Conversational Structure Aware Graph

^{*}Corresponding author.

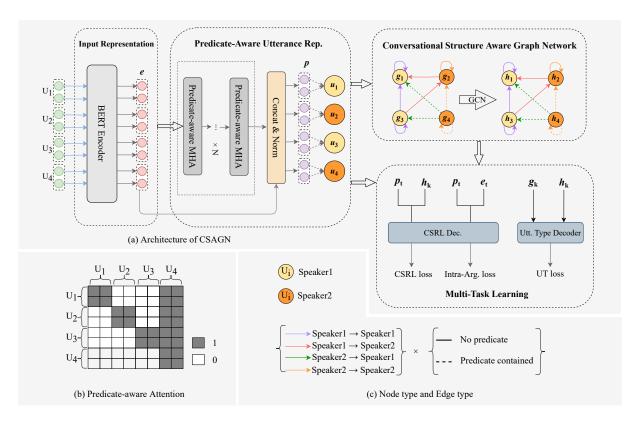


Figure 2: The overview of our proposed CSAGN.

Network (CSAGN) for learning high-level structural features to represent utterances (Sec. 2.3). The resulted utterance representations are incorporated with token representations obtained in the previous two components. With the enhanced token representations, our model predicts the arguments for the given predicate.

In addition, we introduce a multi-task learning method with two new objectives. Experimental results on benchmark datasets show that our model substantially outperforms existing baselines. Our proposed training objectives could also help the model to better learn predicate-aware token representations and structure-aware utterance representations. Our code is publicly available at https://github.com/hahahawu/CSAGN.

2 Model

The overall architecture of CSAGN is illustrated in Figure 2 which consists of three main components, and we introduce them as follows:

2.1 Input Representation

Given a dialogue $\mathbf{C} = (u_1, u_2, ..., u_K)$ of K utterances, where $u_k = (w_{k,1}, w_{k,2}, ..., w_{k,|u_k|})$ consists of a sequence of words, we first use a pretrained language model such as BERT to obtain the

initial context representation e.

2.2 Predicate-Aware Utterance Representation

We propose a new attention strategy to better learn predicate-aware context representations for tokens. Specifically, tokens are only allowed to attend to tokens in the same utterance or the utterance that includes the predicate:

$$\mathit{Mask}[i,j] = \left\{ \begin{array}{cc} 1 & , & \textit{if } \mathbb{U}_i = \mathbb{U}_j \textit{ or } \mathbb{U}_j = \mathbb{U}_{pred} \\ 0 & , & \textit{otherwise} \end{array} \right.$$

where i, j are the token indexes in the dialogue, \mathbb{U}_i and \mathbb{U}_j are the utterances that the i-th and j-th token belongs to, \mathbb{U}_{pred} is the utterance that includes the given predicate. For example, in Figure 2(b), assuming U_4 includes the predicate, previous utterances U_1, U_2 and U_3 could attend to themselves and U_4 , while U_4 only attends to itself.

In practice, we use additional four self-attention blocks (Vaswani et al., 2017) with our proposed attention strategy to learn predicate-aware context representations from e, which results in token representations p. Then, we obtain utterance representations u by max-pooling over words in the same utterance.

2.3 Conversational Structure Aware Graph Network

We present the Conversational Structure Aware Graph Network (CSAGN) to capture speaker dependent contextual information in a conversation. In particular, we design a *directed* graph from the encoded utterances to capture the interaction between the speakers.

Formally, a conversation having K utterances is represented as a directed graph $\mathcal{G} = (\mathcal{V}, \mathcal{E}, \mathcal{R}, \mathcal{W})$, with vertices $v_i \in \mathcal{V}$; labeled edges (relations) $e_{ij} \in \mathcal{E}$ with label $r_{ij} \in \mathcal{R}$ are the relations between vertices v_i and v_j ; $\alpha_{ij} \in \mathcal{W}$ is the weight of the relational edge r_{ij} with $0 \le \alpha_{ij} \le 1$. Furthermore, the graph is constructed from the utterances in the following way:

Vertices: Each utterance in the conversation is represented as a vertex $v_i \in \mathcal{V}$ in \mathcal{G} . Each vertex v_i is initialized with its corresponding representation in u, say g_i .

Edges: Each utterance (vertex) is contextually dependent on its past utterances in a conversation, thus each vertex v_i has an edge with the vertices that represent the past utterances: $\{v_0, v_1,...,v_{i-1}\}$.

Edge weights: We calculate edge weights as follows: for vertex v_j , the weight of incoming edge r_{ij} is:

$$\alpha_{ij} = \operatorname{softmax}(g_j^T \mathbf{W}_e[g_0, ..., g_{i-1}])$$

where \mathbf{W}_e is the attention matrix learnt from the training. This ensures that, vertex v_i which has incoming edges with vertices vertex $v_0,...,v_{i-1}$ receives a total weight contribution of 1.

Relations: The relation r of an edge r_{ij} depends upon two aspects:

Speaker dependency – The relation depends on both the speakers of the constituting vertices: $p_s(v_i)$ (speaker of u_i) and $p_s(v_i)$ (speaker of u_i).

Predicate dependency – The relation also depends upon whether the utterance u_i or u_j includes the predicate.

If there are M distinct speakers involving in a conversation, then the number of relational edge types is $M(\text{from_speaker}) * M(\text{to_speaker}) * 2$ (containing predicate or not) = $2M^2$.

Graph feature transformation We now discuss how to propagate global information among the nodes. Following previous work (Schlichtkrull

et al., 2018; Ghosal et al., 2019), we use a twostep graph convolution process which essentially can be understood as a special case of messenge passing method (Gilmer et al., 2017) to encode the nodes. We formulate the process as following:

$$h_i^{(1)} = \sigma(\sum_{r \in \mathcal{R}} \sum_{j \in \mathcal{N}_i^r} \frac{\alpha_{ij}}{c_{i,r}} W_r^{(1)} g_j + \alpha_{ii} W_0^{(1)} g_i),$$

$$h_i^{(2)} = \sigma(\sum_{j \in \mathcal{N}_i^r} W^{(2)} h_j^{(1)} + W_0^{(2)} h_i^{(1)}),$$

$$for \ i = 1, 2, ..., K.$$

where $h_i^{(l)}$ is the i-th encoded node feature from l-th layer. \mathcal{N}_i^r denotes the neighboring nodes of i-th node under relation $r \in \mathcal{R}$. σ is ReLU (Nair and Hinton, 2010) function. $W_r^{(1)}, W_0^{(2)}, W_0^{(l)}, c_{i,r}$ are learnable parameters.

After the message propagation, the node representations are updated with the initial node embeddings and the message representations. The final utterance representations are denoted as h.

3 Multi-Task Learning

In this section, we describe how to train the model, based on the representations e, p, g and h.

SRL Objective. Formally, given an input conversation x, this objective is to minimize the negative log likelihood of the corresponding correct label sequence y. Our model predict the corresponding label y_t based on the token representation p_t and its corresponding utterance representation h_k :

$$p(y_t|\mathbf{x}; \boldsymbol{\theta}) = p(y_t|\mathbf{p_t}, \mathbf{h_k}; \boldsymbol{\theta})$$

$$= \operatorname{softmax}(\mathbf{W_c}[\mathbf{p_t} \oplus \mathbf{h_k}])^T \delta_{y_t}$$
(1)

where W_c is the softmax matrix and δ_{y_t} is Kronecker delta with a dimension for each output symbol, so $\operatorname{softmax}(W_c[h_t \oplus g_k])^T \delta_{y_t}$ is exactly the y_t 'th element of the distribution defined by the softmax.

Intra-Argument Objective. The arguments in CSRL could be categorized into two classes, i.e., the intra- and cross-arguments, where the former are in the same dialogue turns as the predicate while the latter usually occur in the dialogue history. Intuitively, the model should be able to identify the intra-arguments without using the dialogue contextual information. Motivated by this observation,

Method	DuConv				NewsDialog			PersonalDialog		
	$F1_{all}$	$F1_{cross}$	$F1_{intra}$	$F1_{all}$	$F1_{cross}$	$\overline{F1_{intra}}$	$\overline{\mathrm{F1}_{all}}$	$F1_{cross}$	$F1_{intra}$	
SimpleBERT	86.54	81.62	87.02	77.68	51.47	80.99	66.53	30.48	70.00	
CSRL-BERT	88.46	81.94	89.46	78.77	51.01	82.48	68.46	32.56	72.02	
Ours	89.47	84.57	90.15	80.86	55.54	84.24	71.82	36.89	75.46	
w/o Predicate-Aware Rep.	88.34	82.09	89.36	79.94	56.46	82.87	69.51	28.25	73.36	
w/o SAGN	88.64	83.03	89.36	77.97	50.16	81.86	70.32	32.41	72.24	
w/ SRL Objective	89.10	83.88	89.73	78.70	54.25	82.14	69.54	29.00	73.49	
w/o Intra-Argument Objective	88.67	83.90	89.33	80.55	55.87	84.00	70.29	34.04	73.91	
w/o Utterance-Type Objective	89.16	83.66	90.15	79.36	54.02	82.80	70.70	33.04	74.81	
w/ Full Attention	88.75	83.08	89.68	79.09	51.78	82.64	70.07	32.32	73.66	
w/o speaker dependency	89.03	83.84	89.56	79.75	56.31	82.75	70.61	34.89	74.21	
w/o predicate dependency	89.04	84.12	89.55	79.70	54.76	83.11	71.06	36.23	74.66	

Table 1: Evaluation results on the DuConv, PersonalDialog and NewsDialog datasets.

we introduce a new loss function that only uses e and p to predict the **intra**-arguments:

$$\mathcal{L}_{intra} = -\sum_{t=1}^{n} \log p(y_t | \boldsymbol{x}; \boldsymbol{\theta}) \sigma(y_t)$$

$$\mathbf{P} = [\boldsymbol{p_t}, |\boldsymbol{p_t} - \boldsymbol{e_t}|, \boldsymbol{p_t} \odot \boldsymbol{e_t}, \boldsymbol{e_t}] \quad (2)$$

$$p(y_t | \boldsymbol{x}; \boldsymbol{\theta}) = p(y_t | \boldsymbol{e_t}, \boldsymbol{p_t}; \boldsymbol{\theta})$$

$$= \operatorname{softmax}(\boldsymbol{W_c} \mathbf{P})^T \delta_{y_t}$$

where $\sigma(y_t)$ is a boolean scalar that indicates whether y_t is an intra-argument token, W_c is the softmax matrix that used in the SRL Objective.

Utterance Type Objective. We additionally introduce a utterance type objective to learn better utterance representations. Specifically, we classify all utterances into three categories, namely predicate-utterance (utterances containing the predicate), argument-utterance (utterances containing arguments but not containing the predicate) and irrelevant-utterance (utterances without any arguments). We use utterance representations g and h to classify the utterance type:

$$\mathcal{L}_{ut} = -\sum_{k=1}^{K} \log p(y_k | \boldsymbol{g_k}, \boldsymbol{h_k}; \boldsymbol{\theta})$$
 (3)

where y_k is the utterance type and K is the total number of utterances.

Finally, we jointly consider these three types of loss: $\mathcal{L} = \alpha_1 * \mathcal{L}_{SRL} + \alpha_2 * \mathcal{L}_{intra} + \alpha_3 * \mathcal{L}_{ut}$, where $\alpha_1, \alpha_2, \alpha_3$ are hyper parameters.

4 Experiments

We evaluate our model on three datasets, i.e., DuConv (Wu et al., 2019), NewsDialog (Wang

et al., 2021) and PersonalDialog (Wu et al., 2019).¹ DuConv is a multi-turn dialogue dataset that focuses on the domain of movie and star, while News-Dialog and PersonalDialog are open-domain dialogue datasets.² We use the same train/dev/test split as Xu et al. (2021): DuConv annotations are splitted into 80%/10%/10% as train/dev/in-domain test set while the NewsDialog and PersonalDialog annotations are treated as the out-domain test set.

The hyper-parameters used in our model are listed as follows. The hop size and embedding dimension of CSAGN is set to 4 and 100, respectively. The $\alpha_1, \alpha_2, \alpha_3$ are set to 1.0, 1.0 and 1.0, respectively. The batch size is set to 128.

Results and Discussion. We used the microaverage F1 scores over the (predicate, argument, label) tuples. Following Xu et al. (2021), we also evaluate F1 scores over intra- and cross-arguments. We compare with two baselines that use different strategies to encode the dialogue history and speaker information. In particular, *SimpleBERT* (Shi and Lin, 2019) uses the BERT as their backbone and simply concatenates the entire dialogue history with the predicate; *CSRL-BERT* (Xu et al., 2021) also uses the BERT but attempts to encode the dialogue structural information by integrating the dialogue turn and speaker embeddings in the input embedding layer. Table 1 summarizes the results of our model and these baselines.

We can see that our model significantly outperforms existing baselines on both the in-domain and out-domain datasets. We can also see that

¹The CSRL annotations of these datasets are provided by Xu et al. (2021)

²More details about the annotations on these datasets are listed in Appendix.

our model benefits from the multi-task training. In particular, when only using the SRL objective, the $F1_{all}$ scores drop by 0.37, 2.16 and 2.28 on three datasets. Without using either the intra-argument or utterance-type objective, the performances on all datasets also decrease. Moreover, we observe that introducing the intra-argument objective could consistently improve $F1_{intra}$ while the utterance-type objective is more important to the $F1_{cross}$. We think this is because (1) the intra-argument objective denoises the noise from other irrelevant information within the dialogue context; (2) identifying cross-arguments requires a better understanding of the global dialogue structures.

Let us first look at the impact of different components on our model. From Table 1, we can see that both the predicate-aware representation and speaker-aware graph network (SAGN) could improve the F1_{cross} performance. These results indicate that (1) the predicate-aware attention strategy could help the model to better capture the long-distance dependencies between arguments and predicates; (2) the speaker information encoded in the SAGN is also helpful to identify arguments across dialogue turns. Furthermore, we also experiment with the full attention strategy to obtain predicate-aware representations, that is, each token attends to all tokens in the entire dialogue. From Table 1, we can see that this strategy achieves worse performance over all metrics. This result is expected since the full attention treats all utterances equally, therefore it may encode irrelevant and noisy dependencies into the contextual representation.

Recall that, we model two types of dependencies in our graph neural network, i.e., the speaker and predicate dependency. We investigate the impact of each dependency on our model and results are shown in Table 1. We can see that removing either dependency may hurt the performance, especially the $F1_{cross}$ score. This result suggests that these structural information is useful for identifying the cross arguments.

5 Conclusion

In this paper, we propose a conversational structure aware graph network for the task of conversational semantic role labeling and a multi-task learning method. Experimental results on the benchmark dataset show that our method significantly outperforms previous baselines and achieves the state-of-

the-art performance.

Acknowledgement

We would like to thank the anonymous reviewers for their valuable and constructive comments. This work was supported in part by the Technological Breakthrough Project of Science, Technology and Innovation Commission of Shenzhen Municipality under Grants JSGG20201102162000001, the Guangdong Basic and Applied Basic Research Foundation under Key Project 2019B1515120032, and the City University of Hong Kong Teaching Development Grants 6000755.

References

Paweł Budzianowski, Tsung-Hsien Wen, Bo-Hsiang Tseng, Iñigo Casanueva, Stefan Ultes, Osman Ramadan, and Milica Gašić. 2018. MultiWOZ - a large-scale multi-domain Wizard-of-Oz dataset for task-oriented dialogue modelling. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 5016–5026, Brussels, Belgium. Association for Computational Linguistics.

Eunsol Choi, He He, Mohit Iyyer, Mark Yatskar, Wentau Yih, Yejin Choi, Percy Liang, and Luke Zettlemoyer. 2018. QuAC: Question answering in context. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2174–2184, Brussels, Belgium. Association for Computational Linguistics.

Emily Dinan, Stephen Roller, Kurt Shuster, Angela Fan, Michael Auli, and Jason Weston. 2019. Wizard of wikipedia: Knowledge-powered conversational agents. In 7th International Conference on Learning Representations, ICLR 2019, New Orleans, LA, USA, May 6-9, 2019. OpenReview.net.

Deepanway Ghosal, Navonil Majumder, Soujanya Poria, Niyati Chhaya, and Alexander Gelbukh. 2019. DialogueGCN: A graph convolutional neural network for emotion recognition in conversation. In Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP), pages 154–164, Hong Kong, China. Association for Computational Linguistics.

Justin Gilmer, Samuel S. Schoenholz, Patrick F. Riley, Oriol Vinyals, and George E. Dahl. 2017. Neural message passing for quantum chemistry. In *Proceedings of the 34th International Conference on Machine Learning, ICML 2017, Sydney, NSW, Australia, 6-11 August 2017*, volume 70 of *Proceedings of Machine Learning Research*, pages 1263–1272. PMLR.

Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. 2017. DailyDialog: A manually labelled multi-turn dialogue dataset. In *Proceedings of the Eighth International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 986–995, Taipei, Taiwan. Asian Federation of Natural Language Processing.

Nikola Mrkšić, Diarmuid Ó Séaghdha, Tsung-Hsien Wen, Blaise Thomson, and Steve Young. 2017. Neural belief tracker: Data-driven dialogue state tracking. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1777–1788, Vancouver, Canada. Association for Computational Linguistics.

Vinod Nair and Geoffrey E. Hinton. 2010. Rectified linear units improve restricted boltzmann machines. In *Proceedings of the 27th International Conference on Machine Learning (ICML-10), June 21-24, 2010, Haifa, Israel*, pages 807–814. Omnipress.

Siva Reddy, Danqi Chen, and Christopher D. Manning. 2019. CoQA: A conversational question answering challenge. *Transactions of the Association for Computational Linguistics*, 7:249–266.

Michael Schlichtkrull, Thomas N Kipf, Peter Bloem, Rianne Van Den Berg, Ivan Titov, and Max Welling. 2018. Modeling relational data with graph convolutional networks. In *European semantic web conference*, pages 593–607. Springer.

Peng Shi and Jimmy Lin. 2019. Simple bert models for relation extraction and semantic role labeling. *arXiv* preprint arXiv:1904.05255.

Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. Attention is all you need. In Advances in Neural Information Processing Systems 30: Annual Conference on Neural Information Processing Systems 2017, December 4-9, 2017, Long Beach, CA, USA, pages 5998–6008.

Xiaoyang Wang, Chen Li, Jianqiao Zhao, and Dong Yu. 2021. Naturalconv: A chinese dialogue dataset towards multi-turn topic-driven conversation. *arXiv* preprint arXiv:2103.02548.

Wenquan Wu, Zhen Guo, Xiangyang Zhou, Hua Wu, Xiyuan Zhang, Rongzhong Lian, and Haifeng Wang. 2019. Proactive human-machine conversation with explicit conversation goal. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pages 3794–3804, Florence, Italy. Association for Computational Linguistics.

Kun Xu, Han Wu, Linfeng Song, Haisong Zhang, Linqi Song, and Dong Yu. 2021. Conversational semantic role labeling. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, pages 1–1.

Dataset	#dialog	#utt	#pred	cross ratio
DuConv	3,000	27,198	33,673	21.89%
NewsDialog	200	6,037	3,621	20.01%
PersonalDialog	300	1,579	1,441	12.56%

Table 2: Statistics of the annotations on DuConv, News-Dialog and PersonalDialog.

A Statistics of the datasets

Table 2 shows the statistics of three datasets, where *cross ratio* is the percent of arguments that are in different utterances with the predicate.